


ΚΟΜΕΤ Α.Ε. Βιομηχανία Αυτοκολλήτων

MASKING TAPE 4220

TECHNICAL DATA SHEET

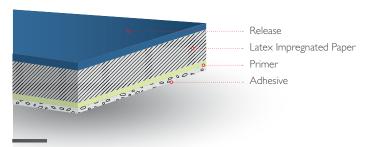

DESCRIPTION:

Saturated semi crepe paper masking tape coated with solvent based natural rubber adhesive.

Suitable for all masking applications and light automotive use.

APPLICATIONS:

- General masking
- Spray painting (automotive use suitable but not recommended)
- · Domestic DIY and Industrial general painting
- · Holding sealing
- Fixing
- · Light duty packaging

PROPERTIES:

- Residue free removal
- Excellent tape to tape adhesion
- · Solvent and thinner resistant
- High initial tack
- Easy tear
- · Excellent conformability
- Suitable for water and solvent based paints
- Easy curving
- Easy application on uneven surfaces

NOMINAL VALUES:

Backing

Impregnated Crepe Paper

Adhesive

Solvent-based, Natural Rubber

Tensile Strength MD

85 ± 20 (N/25mm)

TM 5004 by Afera

Elongation at Break MD

8 ± 2 (%)

TM 5004 by Afera

Adhesion to Steel

Over 3.0 (N/25mm)

TM 5001 by Afera

Rolling Ball Task

Under 5 (cm)

PSTC-6 (PSTC)

Paper thickness

90 ± 15 (mic)

Total thickness

 105 ± 20 (mic)

Application Range

General purpose, Non oven automotive application

Paper Colors White Sharp Yellow

Adhesive Color Transparent 🛮